


Model 49i Ozone Analyzer

UV Photometric gas analyzer with enhanced communication capabilities for ambient air monitoring.

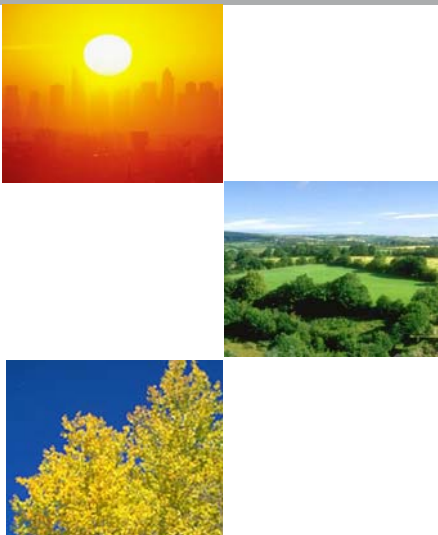

A change is in the air

The industry's new best-of-breed. Our customers told us exactly what they're looking for in a gas monitoring solution: reliability, simplicity, ease of use. The new *iSeries* platform delivers on all counts - and then goes a step farther.

One of the criteria pollutant analyzers in Thermo's new *iSeries* product line is the Model 49i O₃ analyzer.

Using UV Photometric technology, the Model 49i measures the amount of ozone in the air from ppb levels up to 200ppm. The Model 49i is a dual cell photometer, the concept adopted by the NIST for the national ozone standard.

Dual range and auto range are standard features in this instrument. Because the instrument has both sample and reference flowing at the same time a response time of 20 seconds can be achieved.

Temperature and pressure correction are standard features. User settable alarm levels for concentration and for a wide variety of internal diagnostics are available from an easy to follow menu structure.

This state-of-the-art gas analyzer offers features such as an ethernet port as well as flash memory for increased data storage and field upgradability.

Ethernet connectivity provides efficient remote access, allowing the user to download measurement information directly from the instrument without having to be on-site.

You can easily program soft-keys to allow you to jump directly to frequently accessed functions, menus or screens. The larger interface screen can display measurement information and status, while viewing menu and operational screens.

Key Features

- ◆ Ethernet connectivity for efficient remote access
- ◆ Enhanced user interface with one button programming and large display screen
- ◆ Flash memory for increased data storage and user downloadable software
- ◆ Enhanced electronics design optimizes product commonality
- ◆ Improved layout for easier accessibility to components

Comprehensive Service Solutions

To maintain optimal product performance, you need immediate access to experts worldwide, as well as priority status when your air quality equipment needs repair or replacement. Thermo Electron offers comprehensive, flexible support solutions for all phases of the product lifecycle. Through predictable, fixed-cost pricing, Thermo services help protect the return on investment and total cost of ownership of your Thermo Electron air quality products.

Product Specifications

Preset Ranges	0-0.05, 0.1, 0.2, 0.5, 1, 2, 5, 10, 20, 50, 100 and 200 ppm 0-0.1, 0.2, 1, 2, 5, 10, 20, 50, 100, 200 and 400 mg/m ³
Custom Ranges	0-0.05 to 200 ppm 0-0.1 to 400 mg/m ³
Zero Noise	0.25 ppb RMS (60 second averaging time)
Lower Detectable Limit	0.50 ppb
Zero Drift (24 hour)	< 1.0 ppb
Span Drift	<1% full scale per month
Response Time	20 seconds (10 second lag time)
Precision	1.0 ppb
Linearity	+/-1% full scale
Sample Flow Rate	1-3 liters/min.
Operating Temperature	20°C - 30°C
Power Requirements	100 vac, 115 vac, 220-240 vac +/-10% @ 150W
Size and Weight	16.75"(W) x 8.62"(H) x 23"(D), 55 lbs. 425 mm (W) x 219 mm (H) x 584 mm (D), 25 kg
Outputs	Selectable Voltage, RS232/RS485, TCP/IP, 10 Status Relays, and Power Fail Indication (standard). 0-20 or 4-20 mA Isolated Current Outout (optional)
Inputs	16 Digital Inputs (standard), 8 0-10vdc Analog Inputs (optional)

Ordering Information

Model 49i O₃ Analyzer

Choose from the following configurations/options to customize your own Model 49i

Voltage options:

A = 115 Vac 50/60 Hz (standard)
B = 220/240 Vac 50/60 Hz
J = 100 Vac 50/60 Hz

Internal zero / span:

1 = No sample/cal valve (standard)
2 = Internal sample/cal valve assembly
3 = Internal Ozonator setup (including sample/cal valve)

Zero Air Source

N = No Zero Air Source (standard)
Z = Zero Air Source (External Pump)

Optional I/O:

A = None (standard)
C = I/O expansion board
(4-20mA outputs - 6 channels, 0-10v inputs - 8 channels)

Mounting Hardware:

A = Bench mounting (standard)
B = Ears & handles, EIA
C = Ears & handles, Retrofit

Your Order Code: 49i - _ _ _ _ _

Other options:

- Teflon particulate filter
- Rack mounts
- Rear extender
- Terminal Block Kit & Cable 37 pin
- Terminal Block Kit & Cable 25 pin
- Cable, DB37M to open end, 6' LG.
- Cable, DB37F to open end, 6' LG.
- Cable, DB25M to open end, 6' LG.
- Cable, RS232 Null Modem

this specification sheet is for informational purposes only and is subject to change without notice. Thermo makes no warranties, expressed or implied, in this product summary. © 2006 Thermo Electron Corporation. All rights reserved. Thermo Electron Corporation, Analyze. Detect. Measure. Control are trademarks of Thermo Electron Corporation



Lit_49iEID_01/06

Environmental Instruments
Air Quality Instruments

www.thermo.com/air

27 Forge Parkway
Franklin, MA 02038 USA

Takkebijsters 1
Breda, 4817 BL
The Netherlands

+1 (866) 282-0430
+1 (508) 520-1460 fax

+31 (0) 76 5879888
+31 (0) 76 5816520 fax

Thermo
ELECTRON CORPORATION